

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/085763 A3

(51) International Patent Classification⁷: **G01D 5/20**

(74) Agent: **BERESFORD & CO**; 16 High Holborn, London
WV1V 6BX (GB).

(21) International Application Number:
PCT/GB2005/000775

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 1 March 2005 (01.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0404585.2 1 March 2004 (01.03.2004) GB
0420735.3 17 September 2004 (17.09.2004) GB

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **SCIENTIFIC GENERICS LIMITED** [GB/GB]; Harston Mill, Harston, Cambridge CB2 5GG (GB).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **ZHITOMIRSKIY, Victor, Evgenievich** [RU/GB]; Scientific Generics Limited, Harston Mill, Harston, Cambridge CB2 5GG (GB).

Published:

— with international search report

[Continued on next page]

(54) Title: POSITION SENSOR

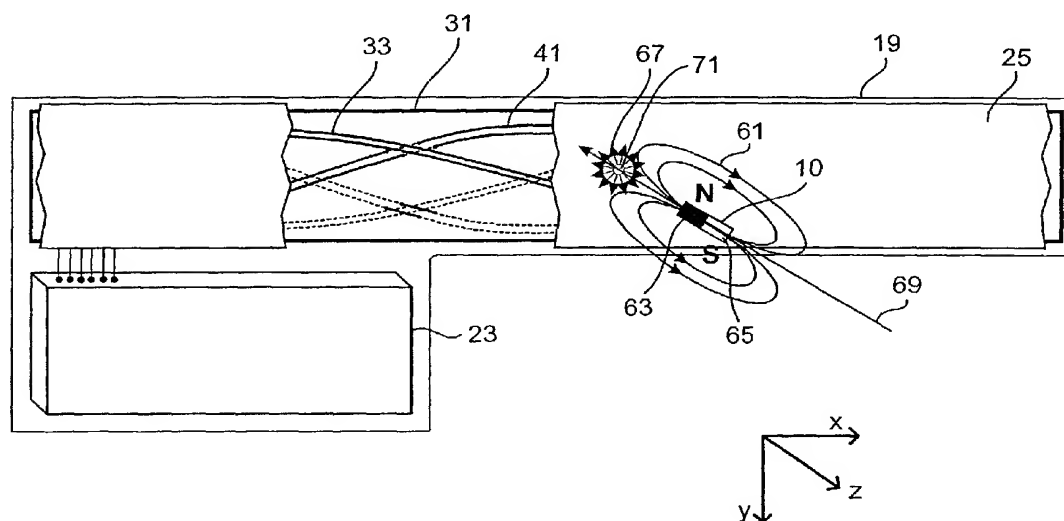

(57) Abstract: A position encoder is provided for indicating the relative position between first and second relatively move members. One of the members carries a magnetic field generator which generates a magnetic field whose magnitude and direction vary with position. In a preferred embodiment, the other member carries an excitation winding, one or more sensor windings and a film of magnetisable material. The arrangement is such that the positionally varying magnetic field interacts with the film to change the mutual coupling between the excitation winding and the or each sensor winding. Excitation and processing circuitry is provided for energising the excitation winding and for processing the sensor signals to determine a value indicative of the relative position between the first and second relatively movable members.

WO 2005/085763 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:
20 October 2005